


# RETRO-REFLECTIVE PHOTOCELL TYPE B-1

DoorKing Part Number  
**8080-057**

This retro-reflective photocell (UL 325 Type B-1) works with **ALL** DoorKing gate operators to comply with the 2018 UL 325 standards. It **must** be wired to the gate operator using the photocell's **NORMALLY OPEN** input so the gate operator can **monitor the photocell**. The photocell is powered by 18-32 VAC **OR** VDC from the gate operator if desired. The relay output is rated for 1 Amp @ 24 VAC **OR** VDC maximum. It **MUST** be mounted vertically as shown and not horizontally to protect it from the weather. The green LED will remain lit when the reflector is aligned correctly with the photocell. **The photocell has a max sensing range of 35 ft.**

## Installation

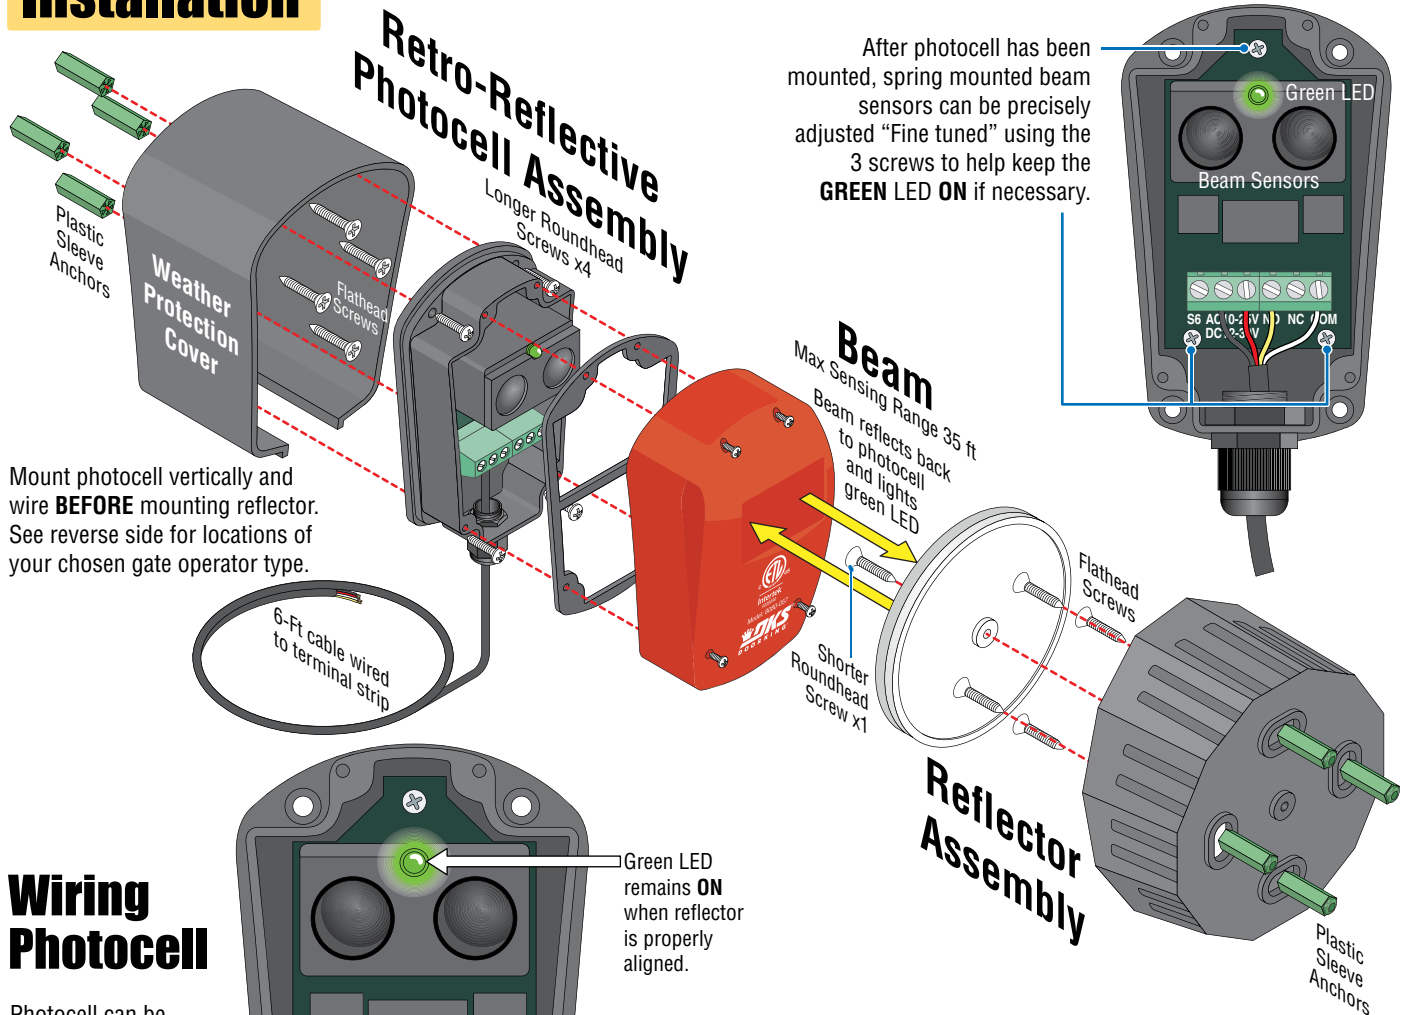

## Wiring Photocell

Photocell can be powered by the gate operator if desired or use a separate UL listed power supply. **DO NOT** connect power supply to a receptacle controlled by a ON/OFF switch.

**Black Wire:** To Ground/Common

**Red Wire:** To 18-32 VAC / VDC

**White Wire:** To Ground/Common on DoorKing Operator Terminal

**Yellow Wire:** To Open or Close Beam on Gate Operator (depending on mounting location) on DoorKing UL 325 Terminal (**Monitored**)

**OR**  
To **Reverse** Input on DoorKing Barrier Operator Terminal 9.


Copyright 2022 DoorKing®, Inc. All rights reserved.



# SLIDE Gate Photo Sensor Locations



DoorKing Part Number  
**8080-057**

Entrapment Protection **MUST** be provided for the DoorKing SLIDE gate system where the risk of entrapment or obstruction exists. The operator will **NOT** run without one or more monitored type B1 or B2 external entrapment protection devices in **EACH** direction of gate travel (minimum of 2 external devices required).

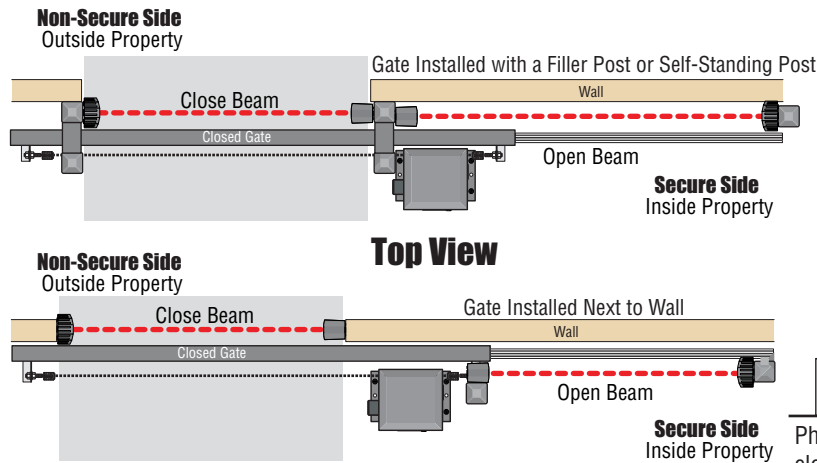


# SWING Gate Photo Sensor Locations

Entrapment Protection **MUST** be provided for the DoorKing SWING gate system where the risk of entrapment or obstruction exists. The operator will not run without one or more monitored type B1 or B2 entrapment protection devices in **EACH** entrapment area.

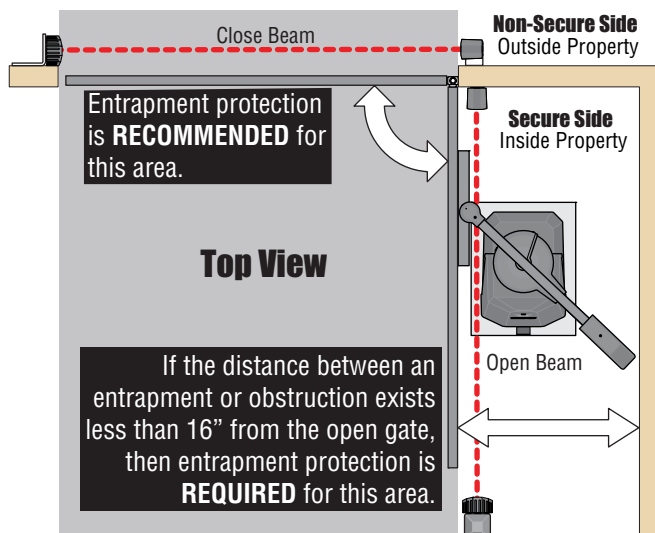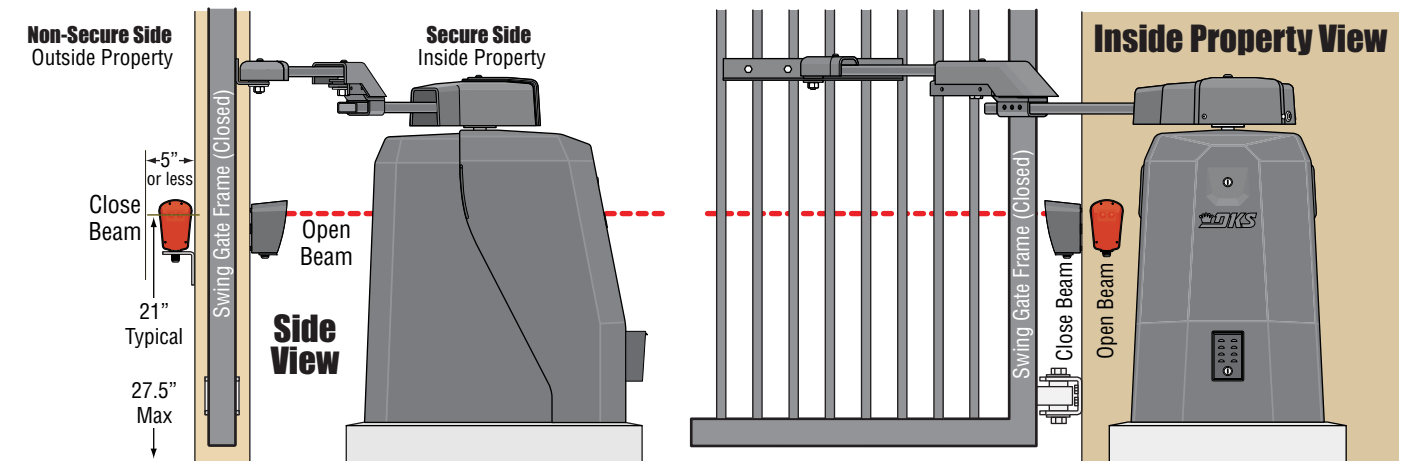

# BARRIER Gate Photo Sensor Location

**DO NOT** mount photocell to the operator cabinet. Cabinet can flex or vibrate during operation which may cause misalignment of the beam.

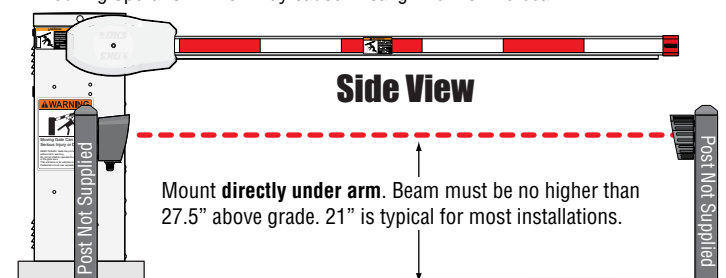

Minimizes the potential of the arm lowering on vehicular or other traffic.

**DOORS DOOR KING**  
120 S. Glasgow Avenue  
Inglewood, California 90301 U.S.A.