


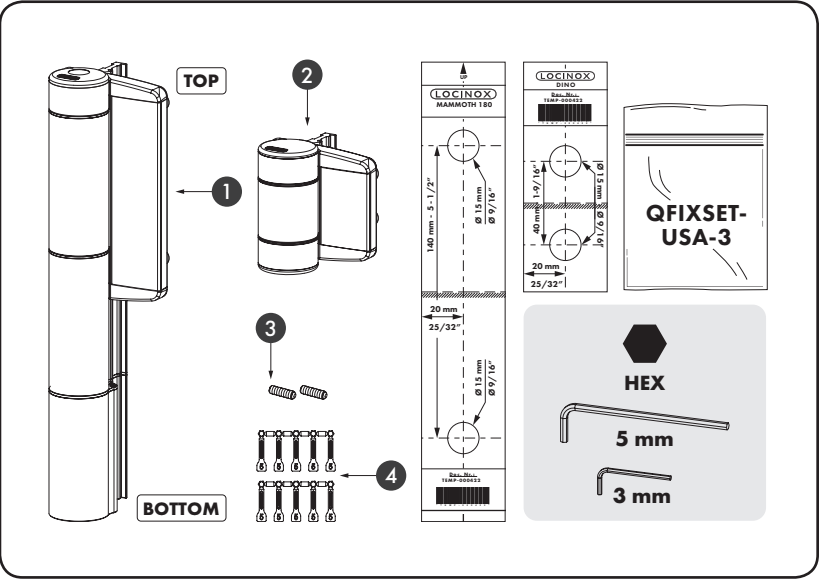

THE PRE-MOUNTED QUICK-FIX IS DESIGNED FOR WALL THICKNESSES OF 0.083" UP TO 0.190"

FOR THICKNESSES FROM 0.200" UP TO 0.313", REPLACE THE PRE-MOUNTED QUICK-FIX BY THOSE IN THE QFIXSET-USA-3 BAG. SEE STEP 6 TO DISASSEMBLE THE QUICK-FIX





LIVE CHAT

www.locinoxusa.com

877-LOCINOX


helpusa@locinox.com

www.locinoxusa.com/mammoth

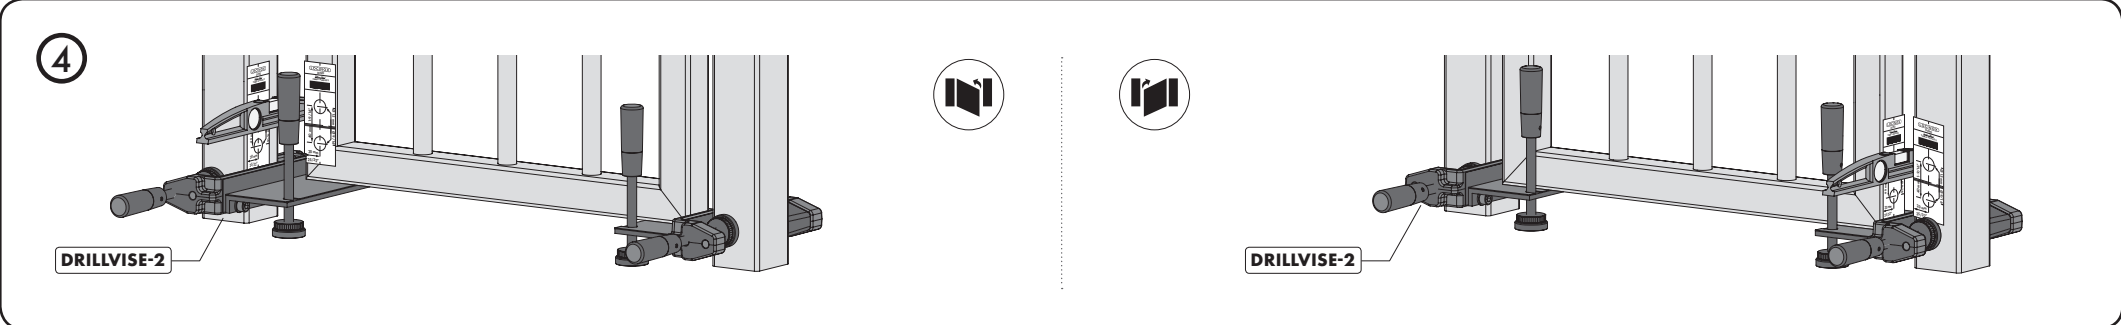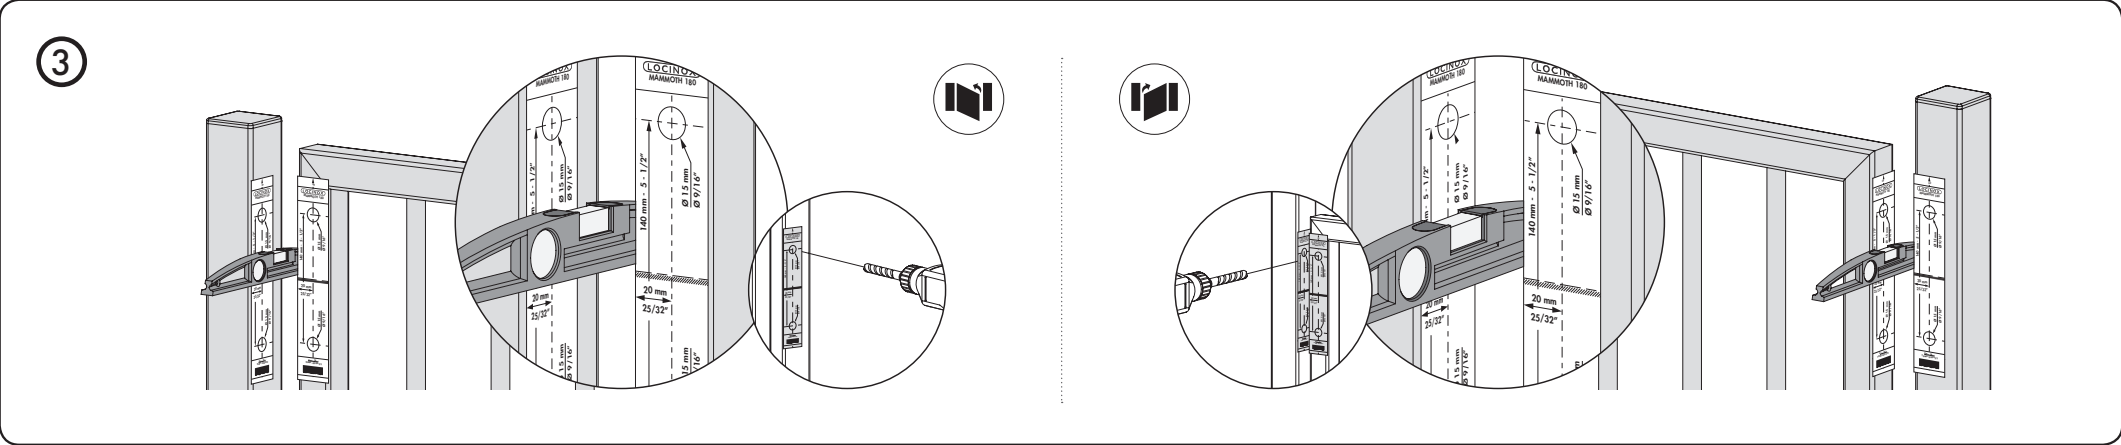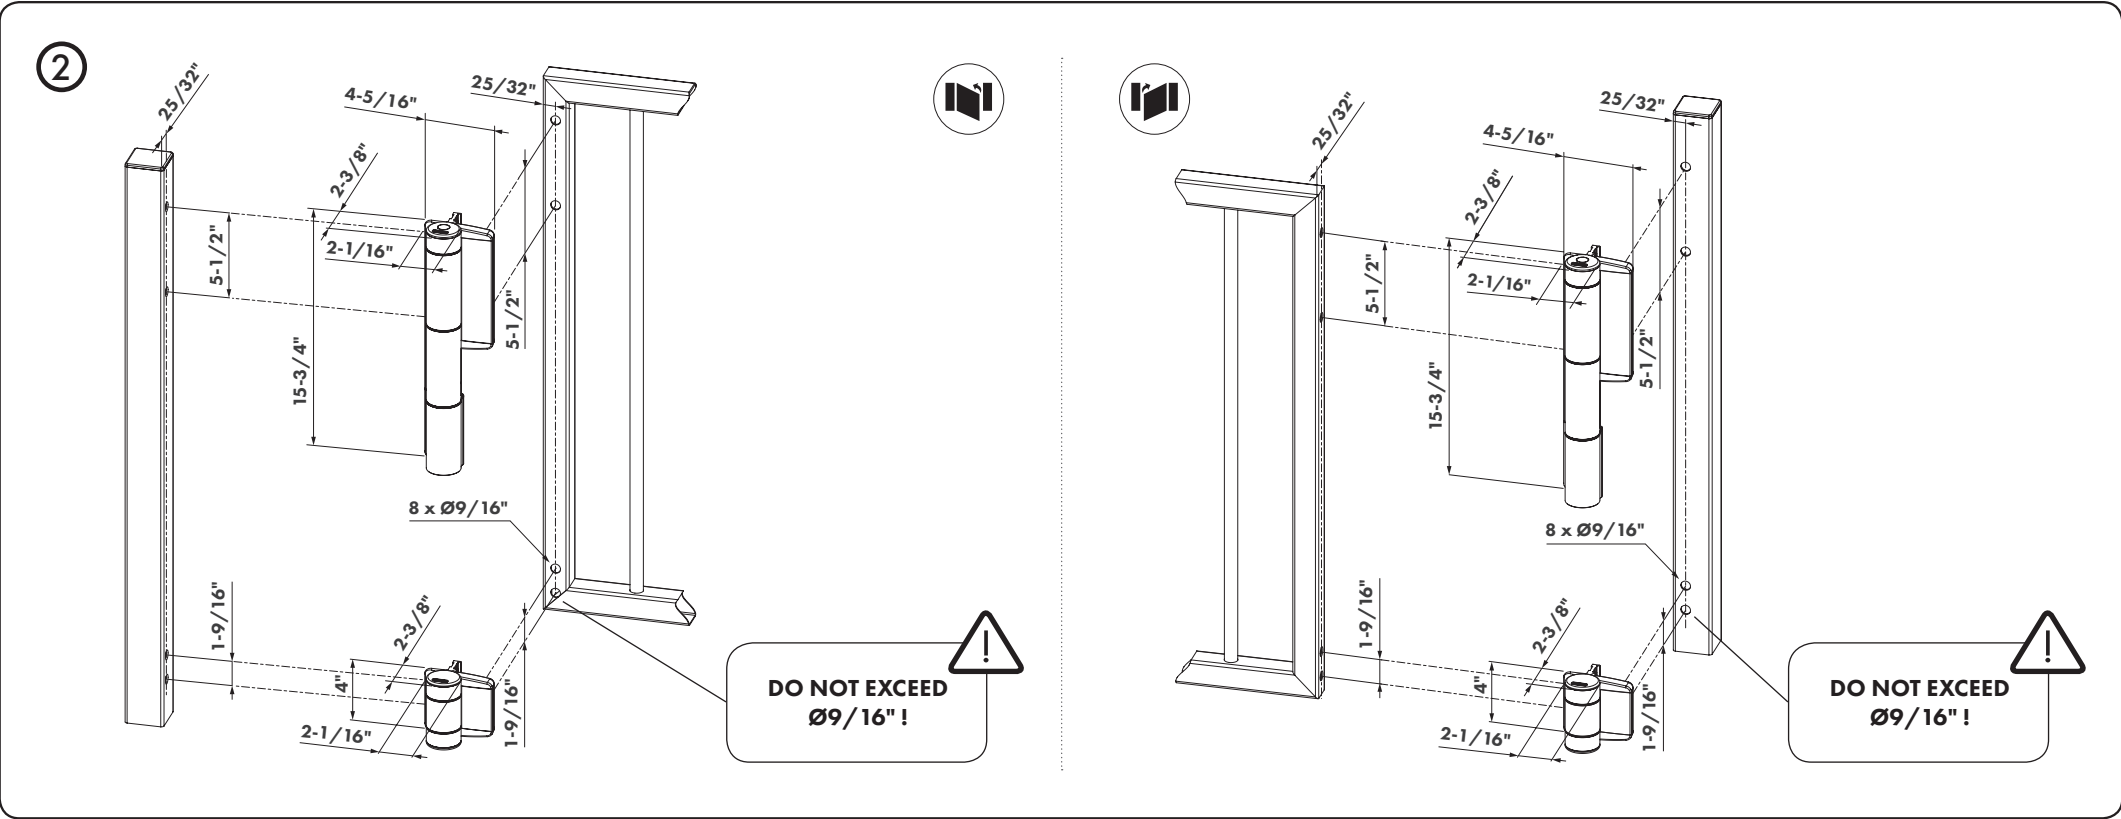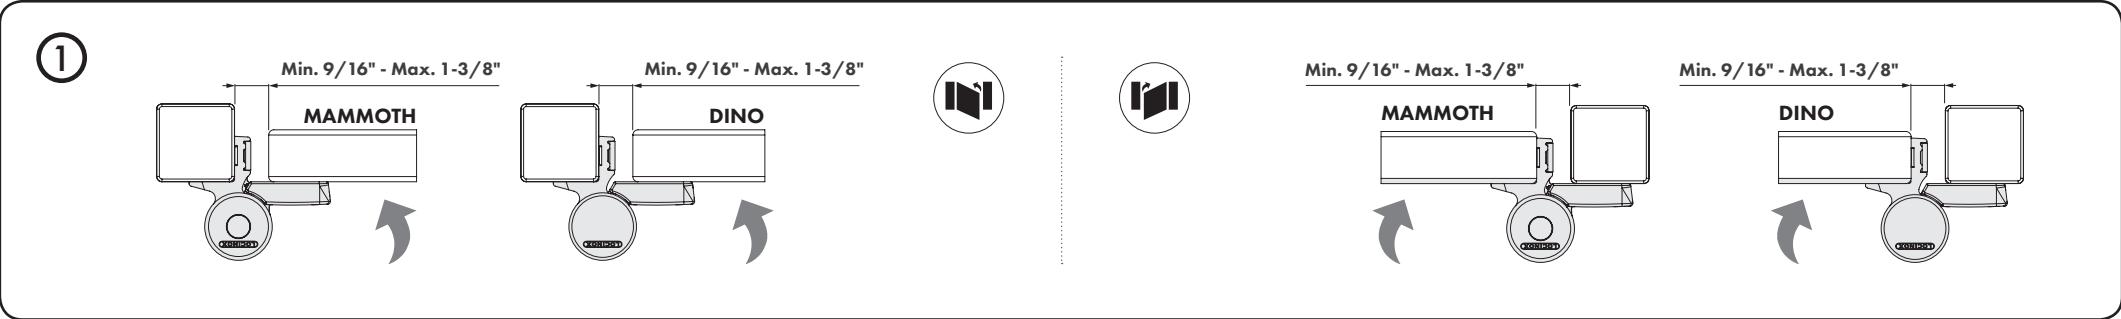


5

MAMMOTH

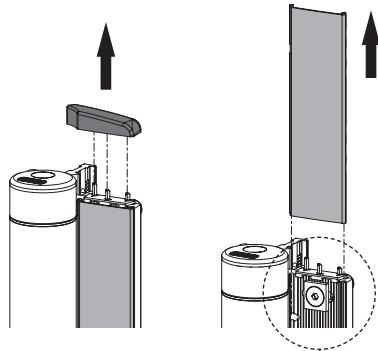

DINO

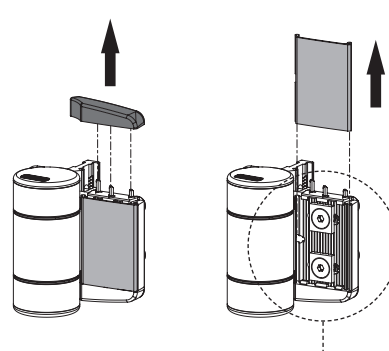


REMOVE THE
COVER CAPS
FIRST TO
REPLACE THE
QUICK-FIX IF
REQUIRED

6



ONLY FOR WALL
THICKNESSES FROM
0.200" UP TO 0.313".
REPLACE THE PRE-
MOUNTED QUICK-
FIX BY THOSE IN THE
QFIXSET-USA-3

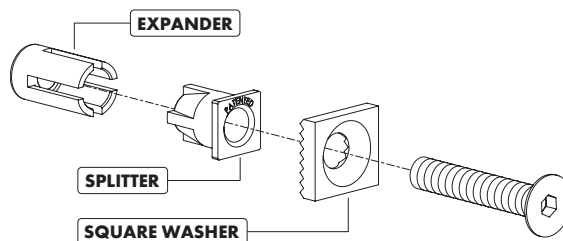


1





REMOVE EXISTING
QUICK-FIX WHERE
NEEDED. DISCARD
EXPANDER, SPLITTER,
BOLT (KEEP WASHER!)

2

REPLACE WITH
QFIXSET-USA-3
AND REUSE
THE SQUARE
WASHER




7

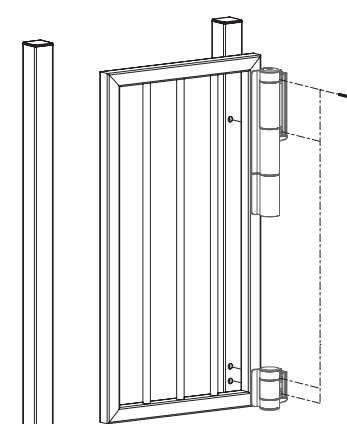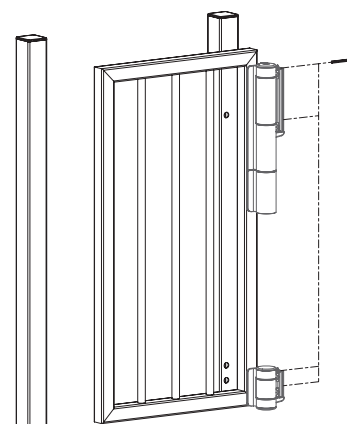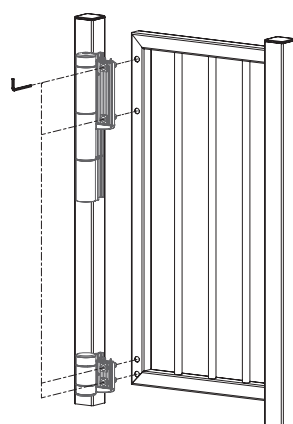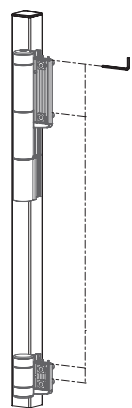


HEX
5mm

8

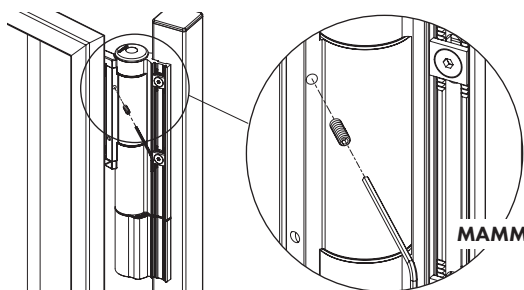

MAMMOTH

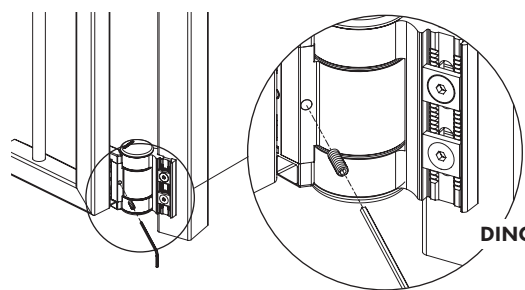

DINO





HEX
3mm





RE-INSTALL THE COVER
CAPS AND LOCK THE
QUICK-FIX COVER
WITH SET SCREW

9

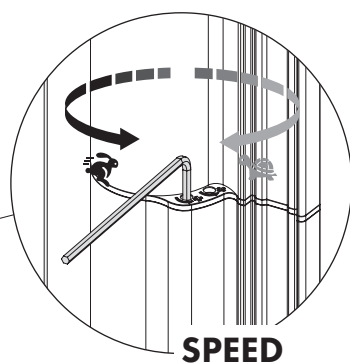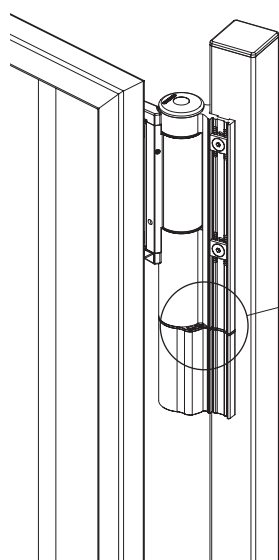

SPEED

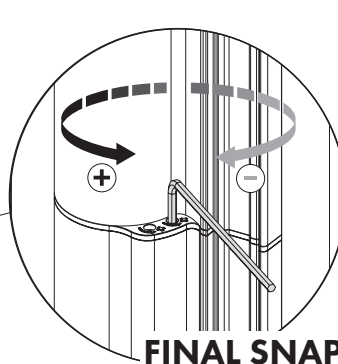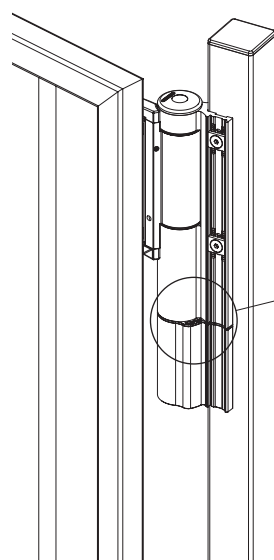

FINAL SNAP



HEX
3mm



pictures@locinox.com

SUCCESSFUL
INSTALLATION?

Please send us your
pictures & videos

INSTALACION
EXITOSA?

Por favor envíenos sus
fotos y videos

LOCINOX

Let's make it better together

Doc. Nr.: MANU-000422

Locinox USA • 460 Windy Point Drive • Glendale Heights • IL 60139
Tel. 877-LOCINOX • E-mail: salesusa@locinox.com



* M A N U - 0 0 0 4 2 2 *