

VERTICLOSE-2-WALL

90° OR 180° HYDRAULIC GATE CLOSER FOR
WALL-MOUNTED GATES UP TO 330 LBS



- ✓ Powerful 180° gate closer for retrofit situations
- ✓ Powder coated aluminum housing
- ✓ 180° closing angle - NO gate stop needed
- ✓ Patented hydraulic damping
- ✓ Closing speed unaffected by humidity and temperature changes
- ✓ ADA compliant: low opening resistance: max. 15 Nm (3-5 lbs). For gates of 4ft or more
- ✓ Adjustable closing speed & final action
- ✓ Specifically designed for exterior use: rain & frost-proof
- ✓ Secure, fast and easy attachment: Quick-Fix mounting bolts
- ✓ Specially designed arm for wall mounting while guaranteeing a big opening angle

ZILV



VERTICLOSE-2-WALL-ZILV

RECOMMENDED APPLICATIONS

- Ornamental steel
- Ornamental aluminum
- For wood and vinyl installations, please contact the manufacturer
- Concrete

INSTALLATION

- Designed for installations in alleyways or narrow spaces
- Retrofit installation using Locinox Quick-Fix mounting bolts with 2,000 lbs holding force
- Installs with ease on square profiles to concrete or wood columns
- No welding required!
- Reversible for left or right opening gates
- Comes with 90° and 180° rail sets for on-site flexibility. The existing hinges will determine the setup needed.
- The Verticlose-2 Wall is a gate closer, not a hinge. Separate, exterior rated hinges are needed and recommended.

RECOMMENDED FOR



INDUSTRIAL & COMMERCIAL



EDUCATION



MILITARY INSTALLATIONS



INWARD OR OUTWARD SWINGING GATES



RESIDENTIAL



ALLEY GATES

CUTTING EDGE SELF-CLOSING TECHNOLOGY



1 CONSISTENCY

If your gate closes too slow, children or pets could sneak through. If your gate closes too fast, it might become a problem for wheelchair users. A loud slamming gate is not only annoying for you and your neighbors, it's also harmful to your gate.

2 COMFORT

The in-house developed high-helix screws guarantee consistent functionality and ensure a comfortable opening speed for elderly or disabled persons.

5 DURABILITY

The powerful torsion spring guarantees the necessary closing force. Your gate will always close, unaffected by strong winds, the width of your gate, or the outside temperature.

3 WEATHERPROOF

Our gate closers are equipped with rotary seals. These seals protect the gate closers from dirt or dust particles intruding the mechanism, assuring your customers worry-free functioning for many years to come.

4 PRECISION

Some customers prefer their gate to close slowly, while others want it to go a little faster. No problem! All our hydraulic gate closers can easily be adjusted to the wishes of your customers in a matter of seconds.

6 QUALITY

The anodized aluminum housing guarantees full protection against all weather conditions. This housing is frost-free and wind, dust and waterproof, which allows your gate closer to function perfectly.


GATE CLOSER & HINGE IN ONE




USE WITH EXISTING HINGES



OPENING ANGLE ALL LOCINOX GATE CLOSERS

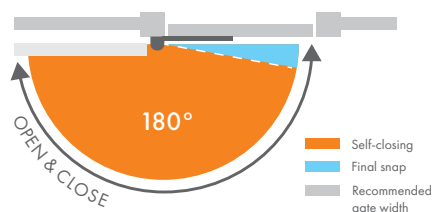

SAMSON-2

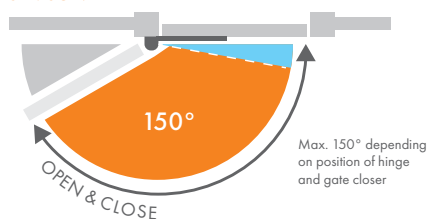

INTERIO (125°) & PANTHER (120°)

