

WIRED KEYPAD AND PROXIMITY READER KPR2000

SECTION 28 13 00



KEY FEATURES

UNIT INTERFACE CAPABILITIES
STAND ALONE

Card/PIN
Yes

SPECIFICATIONS

POWER SUPPLY
PROGRAMMING (DATABASE MANAGEMENT)
WIEGAND OUTPUT DATA FORMAT
LOCAL USER CAPACITY
MAX NUMBER OF GATES/DOORS OF CONTROL (EACH)
RELAY OUTPUT
MOUNTING OPTIONS
OPERATING TEMPERATURE
CAMERA READY
ANTI-TAMPER ALARM
WARRANTY

12VDC (not included in carton)
Keypad
26 and 30 Bit
2000
1
1
Surface/gooseneck
-4°F to 140°F (-20°C to 60°C)
No
Yes
1 year

CONSTRUCTION

ENCLOSURE MATERIAL

Zinc-alloy




WIRED KEYPAD AND PROXIMITY READER

KPR2000

SECTION 28 13 00

DIMENSIONS

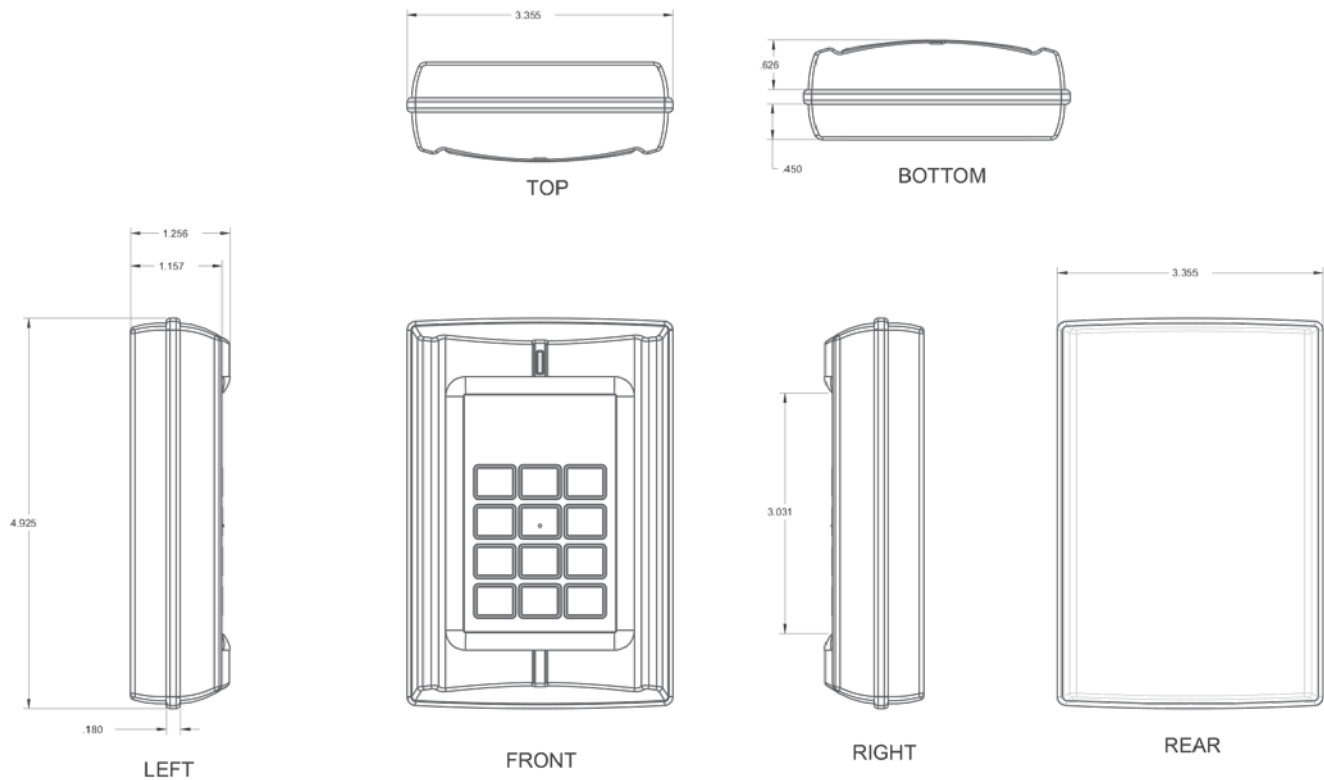

RANGE

KPR2000 Feature	Wired	Wire type	Range
Power 120VAC to 16VDC transformer (from outlet to controller)	x	2 wire (14 AWG) 2 wire (16 AWG) 2 wire (18 AWG)	Up to 300 ft. Up to 200 ft. Up to 100 ft.
Relay output wiring	x	2 wire (18-24 AWG)	Up to 2500 ft.
Wiegand output	x	7 wire (22 AWG)	Up to 500 ft.