




U320^{model}

Can integrate with
CellGate external cameras 

Cellular or Internet
Wiegand Entry

by  cellgate

4 Door Controller with Optional Integrated Cameras



Part Numbers

AAXX-LTE ATT
AAXX-LTE VZN
AAXX-D INT



Part Number:
CB-WIM 2000
1 Wiegand Expansion Board per door/gate
1 Wiegand, 2 inputs, 2 relays

**Each U320 requires a minimum of 1 CB-WIM 2000

> Key Features

- Supports up to 4 doors
- Supports up to 4 cameras
**see external camera sheet*
- Integrated access control and cameras
- Verizon or AT&T LTE service, ships both SIMs
**No VoIP fees required*
- Plug-and-Play internet option
**No VoIP fees required*
- Compatible with any 26-Wiegand reader
- Multi-Wiegand expansion capability
- Manage multiple devices, properties, and users with TrueCloud™ for administration

powered by:
  

U320 Unique Functionality



- Access Codes
- HID Cards
- RFID



- Fobs/Clickers
- CellGate App/TrueCloud
- Schedules



External Camera Options



Up to
4 external
cameras

Photos

- Taken on entry transactions and on demand
- Cloud-stored still photos

Recorded Video

- Pixel activated video stored on SD card or accessible via CellGate technical support
- Recording w/6-second pre-record

*See external camera sheet for more details

1.855.694.2837

 cellgate

cell-gate.com



U320 model

Can integrate with
CellGate external cameras 

Cellular or Internet
Wiegand Entry

by  cellgate




powered by: 

Web Portal

**Manage All Your CellGate Hardware
on One Dashboard**

- Master login for multiple properties
- Login privileges with multiple user tiers
- Resident and visitor credential management
- Mass credential management
- Setup and management of notifications, door/gate hold open schedules
- Date/time logs of all gate and door access attempts, access codes used, and photos of each access attempt

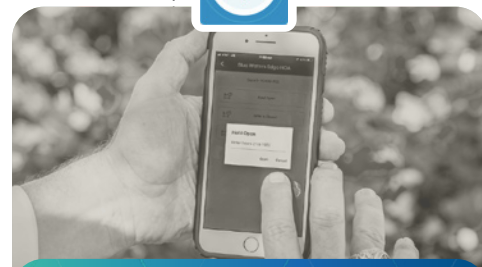

 **cellgate App**

- Momentary open, hold open or close commands
- Take photos (with camera option)

Apps Available on the App
Store and Google Play



Specifications

- Up to 4 Wiegand devices per system
- 8 configurable (NO/NC) relays
- 8 digital inputs for monitoring and triggering relays or cameras
- 10,000 local codes and 65,000 non-local access codes total (4-5 digit codes)
- Post mount keypad
- NEMA 3 steel electronics enclosure: 15"x12"x6"
- Operating temperature: -20°C - 55°C -4°F - 131°F
- Power (12v DC)
5 Amp transformer/power supply (battery not included)
- Notifications
AC: loss of AC power via SMS message (battery required)



1.855.694.2837

 cellgate

cell-gate.com