

1812 CCTV CAMERA KIT


DoorKing Part Number

1812-147

The camera (1894-040) in this kit is a high quality camera with 520 lines of resolution. Minimum illumination is required (.25 Lux). The camera automatically switches from color to black and white in low light conditions. **Not** for use in 1812 Wall Mount Models.

Kit Includes: Camera on mounting bracket, CCTV Circuit board, 2 plastic collars and screws, 12 VDC transformer, Plastic lens.

Installation

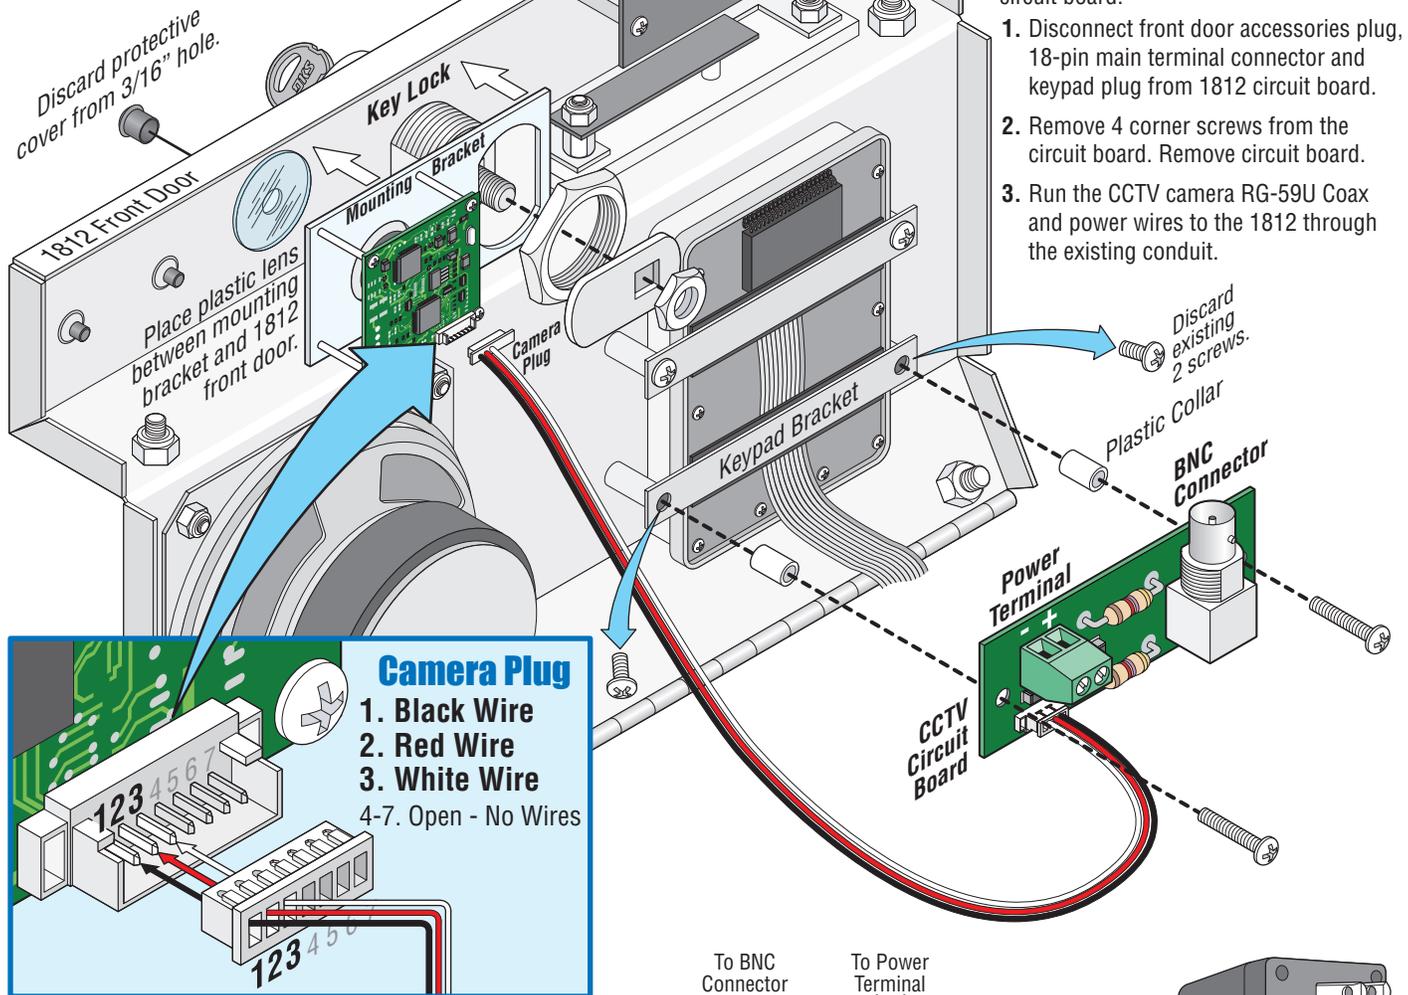


Disconnect power to 1812 !!

Remove 1812 circuit board (Not shown):

CAUTION The 1812 circuit board contains static sensitive components. Discharge any static electricity from your hands by touching a proper ground device **before** removing the circuit board.

1. Disconnect front door accessories plug, 18-pin main terminal connector and keypad plug from 1812 circuit board.
2. Remove 4 corner screws from the circuit board. Remove circuit board.
3. Run the CCTV camera RG-59U Coax and power wires to the 1812 through the existing conduit.

CCTV Circuit Board Connections

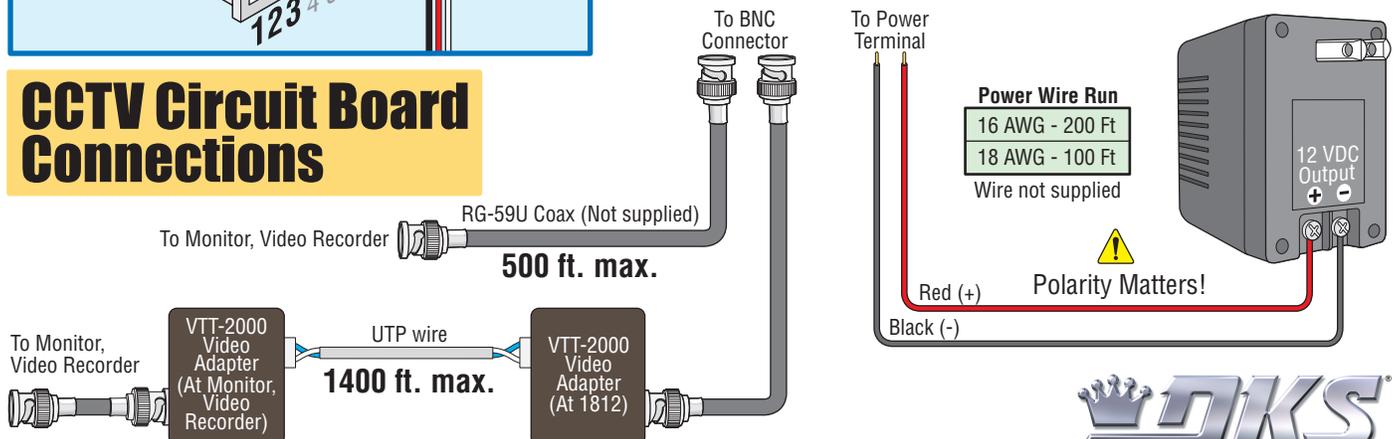

DoorKing offers video adapters (Not supplied) for up to 1400 ft using unshielded twisted pair telephone wire. (P/N 1812-039)

DKS
DOOR KING®
120 S. Glasgow Avenue
Inglewood, California 90301 U.S.A.