


The illustration below shows how to wire the LCR receiver P2 channel so that the remote control can turn ON or OFF the accessory. This allows customer to switch ON or OFF an accessory such as a wired keypad, exit sensor etc... The receiver P2 should be programmed to latch mode.

Once remote button is programmed to P2 and P2 is in the latching mode the remote can then enable or disable the accessory function.

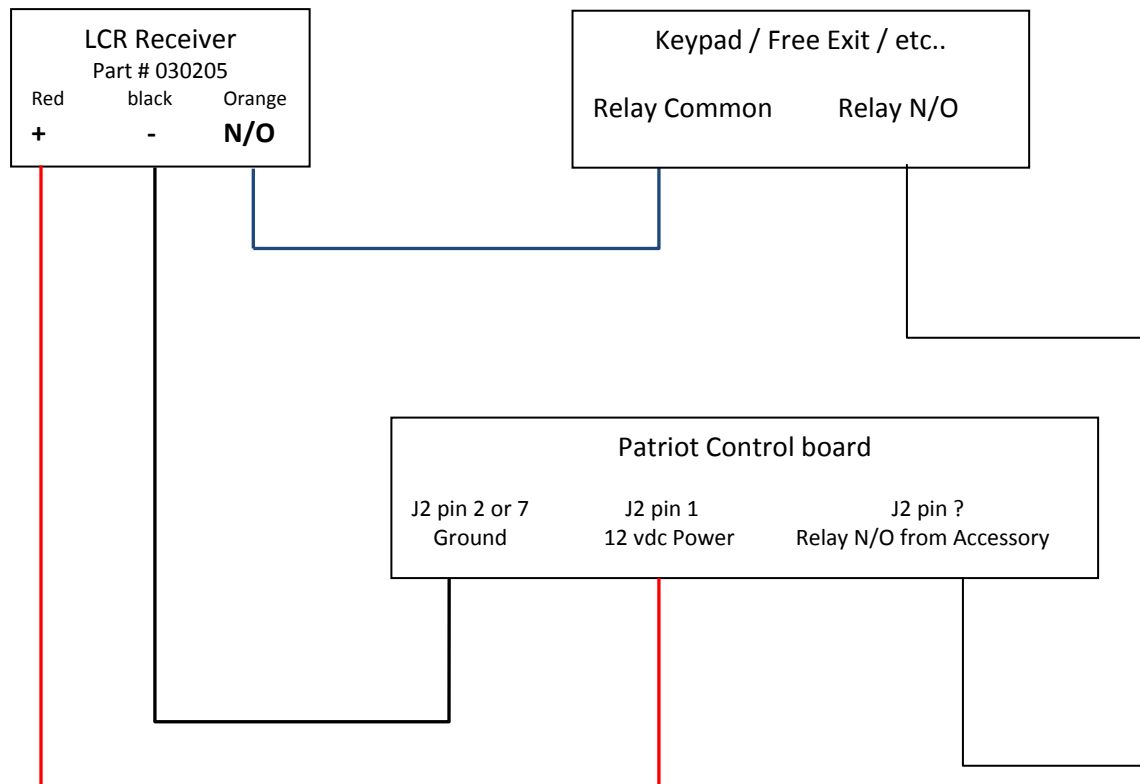

Programming P2 to Latch mode

1. Press P2 and hold down until green light comes ON.
2. Verify if light is solid or flashing green when it first comes ON.
3. If solid then immediately release P2 and press P1 once.
4. Verify mode was changed to latch by pressing P2 and hold until green light comes ON.
5. If green light is flashing when it first comes ON latch mode is set.